



FRONT ELEVATION

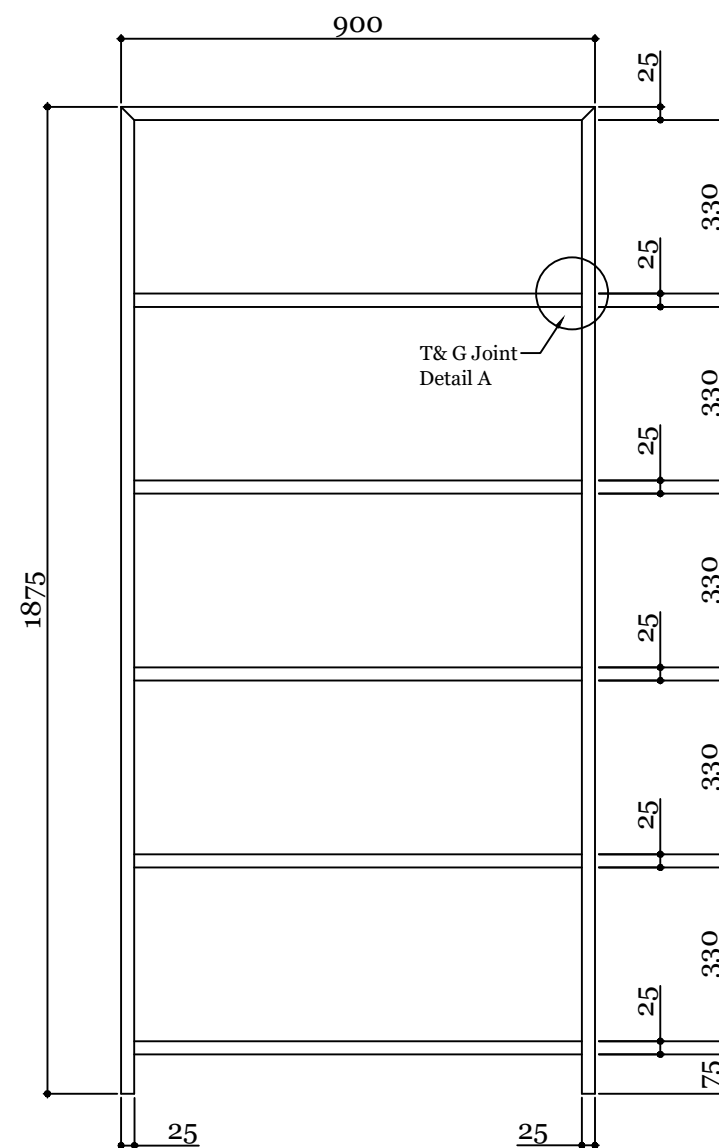


FRONT ELEVATION WITHOUT DOOR

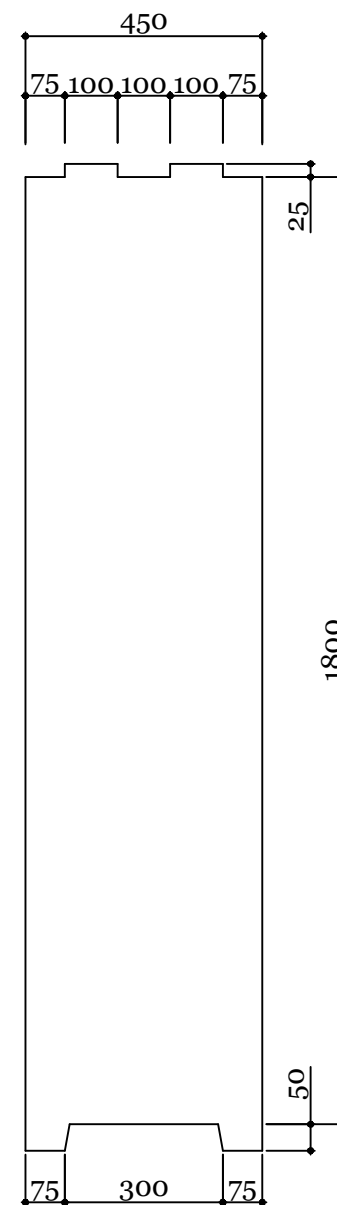


SIDE ELEVATION

NOTES:

1. PROVIDE MORTISE LOCK WITH 3 KEYS.
2. EACH CABINET DOOR TO BE FIXED USING THREE HINGES (100MM)
3. ALL JOINTS SHOULD BE APPLIED WITH PVAC GLUE.
4. ALL SIDE INCLUDING THE BOTTOM SURFACE SHOULD BE FINISHED WITH TWO OR MORE COATS OF RFA TWAL WOOD COLOUR POLYURITHENE.
5. PROVIDE & FIX 100MM BRASS TOWER BOLTS FROM THE INSIDE OF THE LEFT HAND SHUTTER.ONE AT THE TOP & ONE AT THE BOTTOM.
6. PROVIDED 2NOS 125MM BRASS HANDLES.
7. ALL PARTS OF THE INSIDE WILL BE PROPERLY PAINTED WITH TWO OR MORE COATS OF WHITE ENAMEL PAINT OVER WHITE PRIMER.
8. BACK COVER TO BE MADE WITH 6MM PHENOL BONDED PLY WOOD.
9. ONLY WOODEN DOVELS SHALL BE USED & NO NAILS.
10. ALL SHARP EDGES TO BE ROUNDED OFF.
11. ALL PARTS SHALL BE MADE OF SEASONED TIMBER EXCEPT THE BACK COVER.

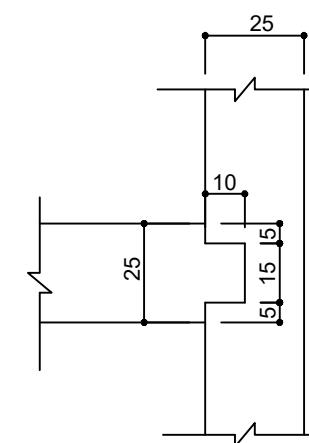

Detail A  
Scale 1:2

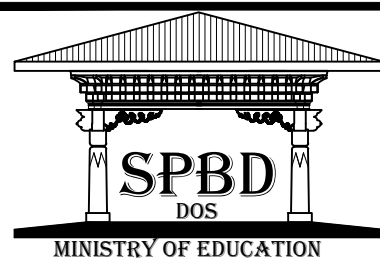

2019	WOODEN CUPBOARD TYPE-2		
	TITLE: ELEVATIONS		
HON'BLE SECRETARY MOE	CHIEF ENGINEER	ARCHITECT	ENGINEER
DIRECTOR, DOS	DRAWN BY	SCALE 1:15	DATE 12/12/2011

NOTES:  
-ALL DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE.  
-ALL DIMENSIONS MEASURE UNFINISHED SURFACES UNLESS SPECIFIED OTHERWISE.  
-ALL DIMENSIONS ARE TO BE READ AND NOT SCALED OFF.  
- ANY DISCREPANCIES IN DRAWINGS SHOULD IMMEDIATELY BE BROUGHT TO THE NOTICE OF THE SPBD DESIGN TEAM

REVISION	DATE	DRAWING CODE: <b>FURN-CB</b>
Mani Pradhan	Aug. 2019	
		DRAWING NO: <b>CB-05</b>